

Exercise 1

Exercise 1

Find **PRE-** and **POST-conditions** for this function.

1. Function:

```
double f (double i,  
          double j,  
          double k)  
{  
    if (i > j)  
        if (i > k)  
            return i;  
        else  
            return k;  
    else  
        if (j > k)  
            return j;  
        else  
            return k;  
}
```

Exercise 1

PRE-Condition:

(not needed)

POST-Condition:

```
// POST: return value is  
//        the maximum of  
//        i, j and k
```

1. Function:

```
double f (double i,  
          double j,  
          double k)  
{  
    if (i > j)  
      if (i > k)  
        return i;  
    else  
        return k;  
    else  
      if (j > k)  
        return j;  
    else  
        return k;  
}
```

Exercise 1

Find **PRE-** and **POST-conditions** for this function.

2. Function:

```
double g (int i, int j)
{
    double r = 0.0;
    for (int k = i; k <= j; ++k)
        r += 1.0 / k;
    return r;
}
```

Exercise 1

2. Function:

```
double g (int i, int j)
{
    double r = 0.0;
    for (int k = i; k <= j; ++k)
        r += 1.0 / k;
    return r;
}
```

PRE-Condition: // PRE: 0 not contained in {i, ..., j}
POST-Condition: // POST: return value is the sum
// $1/i + 1/(i+1) + \dots + 1/j$

Exercise 2

Exercise 2

- What is the **output** of this program?
- You can neglect possible over- or underflows for this exercise.

```
#include <iostream>

int f (int i) {
    return i * i;
}

int g (int i) {
    return i * f(i) * f(f(i));
}

void h (int i) {
    std::cout << g(i) << "\n";
}

int main () {
    int i;
    std::cin >> i;
    h(i);
    return 0;
}
```

Exercise 2

```
i * f(i) * f(f(i))
```

```
#include <iostream>

int f (int i) {
    return i * i;
}

int g (int i) {
    return i * f(i) * f(f(i));
}

void h (int i) {
    std::cout << g(i) << "\n";
}

int main () {
    int i;
    std::cin >> i;
    h(i);
    return 0;
}
```

Exercise 2

```
i * f(i) * f(f(i))
```

```
f(i)
```



```
#include <iostream>

int f (int i) {
    return i * i;
}

int g (int i) {
    return i * f(i) * f(f(i));
}

void h (int i) {
    std::cout << g(i) << "\n";
}

int main () {
    int i;
    std::cin >> i;
    h(i);
    return 0;
}
```

Exercise 2

i * f(i) * f(f(i))

i*i



```
#include <iostream>

int f (int i) {
    return i * i;
}

int g (int i) {
    return i * f(i) * f(f(i));
}

void h (int i) {
    std::cout << g(i) << "\n";
}

int main () {
    int i;
    std::cin >> i;
    h(i);
    return 0;
}
```

Exercise 2

```
i * (i*i) * f(f(i))
```

```
i*i
```



```
#include <iostream>

int f (int i) {
    return i * i;
}


int g (int i) {
    return i * f(i) * f(f(i));
}

void h (int i) {
    std::cout << g(i) << "\n";
}

int main () {
    int i;
    std::cin >> i;
    h(i);
    return 0;
}
```

Exercise 2

i * (i*i) * f(f(i))



f(f(i))

```
#include <iostream>

int f (int i) {
    return i * i;
}


int g (int i) {
    return i * f(i) * f(f(i));
}

void h (int i) {
    std::cout << g(i) << "\n";
}

int main () {
    int i;
    std::cin >> i;
    h(i);
    return 0;
}
```

Exercise 2

i * (i*i) * f(f(i))

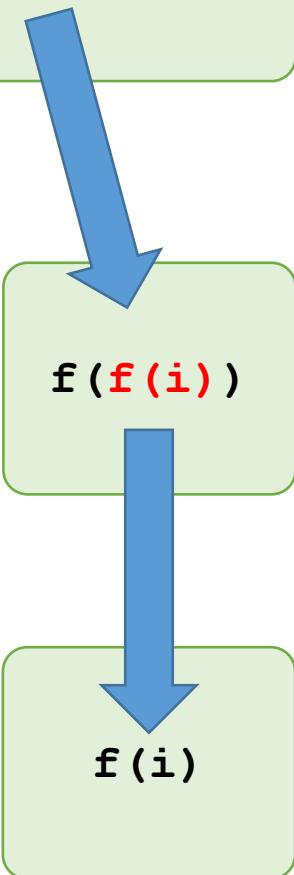

```
#include <iostream>

int f (int i) {
    return i * i;
}


int g (int i) {
    return i * f(i) * f(f(i));
}

void h (int i) {
    std::cout << g(i) << "\n";
}

int main () {
    int i;
    std::cin >> i;
    h(i);
    return 0;
}
```

Exercise 2

i * (i*i) * f(f(i))

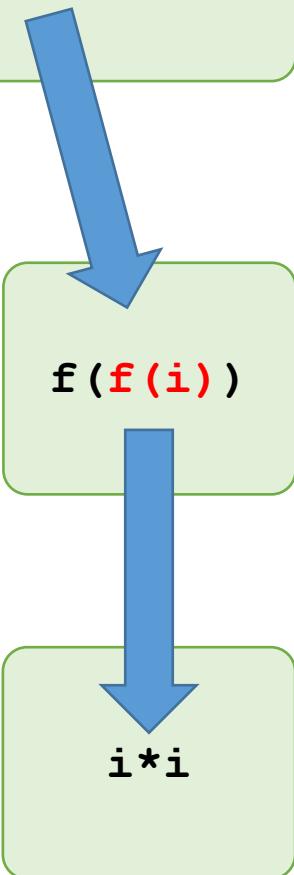

```
#include <iostream>

int f (int i) {
    return i * i;
}


int g (int i) {
    return i * f(i) * f(f(i));
}

void h (int i) {
    std::cout << g(i) << "\n";
}

int main () {
    int i;
    std::cin >> i;
    h(i);
    return 0;
}
```

Exercise 2

i * (i*i) * f(f(i))

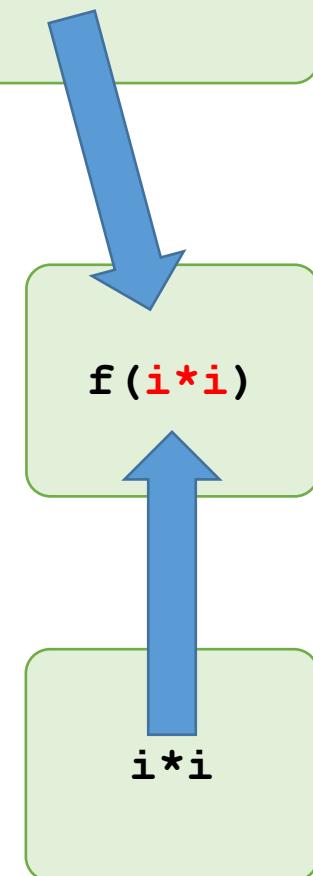

```
#include <iostream>

int f (int i) {
    return i * i;
}

int g (int i) {
    return i * f(i) * f(f(i));
}

void h (int i) {
    std::cout << g(i) << "\n";
}

int main () {
    int i;
    std::cin >> i;
    h(i);
    return 0;
}
```

Exercise 2

i * (i*i) * f(f(i))

f(i*i)

```
#include <iostream>

int f (int i) {
    return i * i;
}

int g (int i) {
    return i * f(i) * f(f(i));
}

void h (int i) {
    std::cout << g(i) << "\n";
}

int main () {
    int i;
    std::cin >> i;
    h(i);
    return 0;
}
```

Exercise 2

i * (i*i) * f(f(i))

(i*i) * (i*i)

```
#include <iostream>

int f (int i) {
    return i * i;
}

int g (int i) {
    return i * f(i) * f(f(i));
}

void h (int i) {
    std::cout << g(i) << "\n";
}

int main () {
    int i;
    std::cin >> i;
    h(i);
    return 0;
}
```

Exercise 2

```
i * (i*i) * ((i*i)*(i*i))
```

```
(i*i)*(i*i)
```

```
#include <iostream>

int f (int i) {
    return i * i;
}

int g (int i) {
    return i * f(i) * f(f(i));
}

void h (int i) {
    std::cout << g(i) << "\n";
}

int main () {
    int i;
    std::cin >> i;
    h(i);
    return 0;
}
```

Exercise 2

```
i * (i*i) * ((i*i)*(i*i))
```

```
#include <iostream>

int f (int i) {
    return i * i;
}

int g (int i) {
    return i * f(i) * f(f(i));
}

void h (int i) {
    std::cout << g(i) << "\n";
}

int main () {
    int i;
    std::cin >> i;
    h(i);
    return 0;
}
```

Exercise 2

```
i * (i*i) * ((i*i)*(i*i))
```

This is
 i^7

```
#include <iostream>

int f (int i) {
    return i * i;
}

int g (int i) {
    return i * f(i) * f(f(i));
}

void h (int i) {
    std::cout << g(i) << "\n";
}

int main () {
    int i;
    std::cin >> i;
    h(i);
    return 0;
}
```