



Programming and Problem-Solving

numpy, matplotlib, pandas

Dennis Komm



Spring 2021 – April 22, 2021

Lists

Advanced Concepts

Listen

So far

- Initializing a list: `x = []` or `x = [1, 4, 8]`
- Initializing a list with ten zeros: `x = [0] * 10`

Listen

So far

- Initializing a list: `x = []` or `x = [1, 4, 8]`
- Initializing a list with ten zeros: `x = [0] * 10`

- Appending elements: `x.append(3)`
- Merging lists: `x = x + y` or `x = x + [5, 7, 9]`

Listen

So far

- Initializing a list: `x = []` or `x = [1, 4, 8]`
- Initializing a list with ten zeros: `x = [0] * 10`
- Appending elements: `x.append(3)`
- Merging lists: `x = x + y` or `x = x + [5, 7, 9]`
- Accessing (and removing) the first element: `z = x.pop(0)`
- Accessing (and removing) the last element: `z = x.pop()`
- Accessing *i*th element: `z = x[i]`

List Comprehensions

Now: List Comprehensions to initialize...

List Comprehensions

Now: List Comprehensions to initialize...

- a list of the first ten natural numbers:

```
x = [i for i in range(0, 10)]
```

List Comprehensions

Now: List Comprehensions to initialize...

- a list of the first ten natural numbers:

```
x = [i for i in range(0, 10)]
```

- a list of the first ten even numbers:

```
x = [i for i in range(0, 20, 2)]
```

List Comprehensions

Now: List Comprehensions to initialize...

- a list of the first ten natural numbers:

```
x = [i for i in range(0, 10)]
```

- a list of the first ten even numbers:

```
x = [i for i in range(0, 20, 2)]
```

- a list of the squares of the first ten natural numbers:

```
x = [i * i for i in range(0, 10)]
```

List Comprehensions

Now: List Comprehensions to initialize...

- a list of the first ten natural numbers:

```
x = [i for i in range(0, 10)]
```

- a list of the first ten even numbers:

```
x = [i for i in range(0, 20, 2)]
```

- a list of the squares of the first ten natural numbers:

```
x = [i * i for i in range(0, 10)]
```

- a list of the squares of [8, 19, 71, 101]:

```
x = [i * i for i in [8, 19, 71, 101]]
```

List Comprehensions

```
[<Expression depending on variable i> for i in <list>]
```

List Comprehensions

[<Expression depending on variable i> **for** i **in** <list>]

[<Expression depending on variable i> **for** i **in** `range(...)`]

List Comprehensions

[<Expression depending on variable i> for i in <list>]

[<Expression depending on variable i> for i in range(...)]

Filter

[<Expression depending on variable i> for i in <list> if <Condition>]

List Comprehensions

[<Expression depending on variable i> for i in <list>]

[<Expression depending on variable i> for i in range(...)]

Filter

[<Expression depending on variable i> for i in <list> if <Condition>]

- List of all numbers from [8, 60, 3, 19, 21] that are larger than 8:

```
x = [i for i in [8, 60, 3, 19, 21] if i > 8]
```

- List of all numbers from [9, 6, 10, 19] that are divisible by 5:

```
y = [9, 6, 10, 19]
x = [i for i in y if i % 5 == 0]
```

Exercise – List Comprehensions

Initialize a list that

- contains all prime numbers between 1 and 1000
- uses the function `primetest` and list comprehensions



```
[<Expression depending on variable i> for i in range(...) if <Condition>]
```

List Comprehensions

```
from math import sqrt

def primetest(x):
    if x < 2 or (x > 2 and x % 2 == 0):
        return False
    d = 3
    while d <= sqrt(x):
        if x % d == 0:
            return False
        d += 2
    return True

y = [i for i in range(1001) if primetest(i)]
```

Accessing Elements

- Accessing element at position 0: `x[0]`

Accessing Elements

- Accessing element at position 0: `x[0]`
- Accessing element at last position: `x[len(x) - 1]`
- Accessing element at last position: `x[-1]`

Accessing Elements

- Accessing element at position 0: `x[0]`
- Accessing element at last position: `x[len(x) - 1]`
- Accessing element at last position: `x[-1]`
- Accessing sublist from positions 4 to 9: `z = x[4:10]`
- Accessing sublist from position 5 `z = x[5:]`
- Accessing sublist to position 3 `z = x[:4]`

Namespaces

Namespaces

So far

- Including own / existing modules
- Square root function from `math`

```
from math import sqrt
```

```
from math import *
```

Namespaces

So far

- Including own / existing modules
- Square root function from `math`

```
from math import sqrt
```

```
from math import *
```

Problem if different modules use same function names

- Use namespaces
- This gives content of module a unique name

```
import math as mymath
```

```
print(mymath.sqrt(9))
```

The Modules numpy and matplotlib

numpy and matplotlib

Two modules are frequently used in a scientific context

- numpy and matplotlib
- They allow a functionality similar to MATLAB

numpy and matplotlib

Two modules are frequently used in a scientific context

- numpy and matplotlib
- They allow a functionality similar to MATLAB

numpy

- Calculations with vectors and matrices
- Numerical methods
- Documentation: <https://numpy.org/doc/>

numpy and matplotlib

Two modules are frequently used in a scientific context

- numpy and matplotlib
- They allow a functionality similar to MATLAB

numpy

- Calculations with vectors and matrices
- Numerical methods
- Documentation: <https://numpy.org/doc/>

matplotlib

- Data visualization (Plots)
- Documentation: <https://matplotlib.org/contents.html>

The Module numpy

The Module `numpy`

numpy builds the foundation for many other scientific modules

The Module `numpy`

numpy builds the foundation for many other scientific modules

Focus on efficient processing of large vectors and matrices

The Module `numpy`

numpy builds the foundation for many other scientific modules

Focus on efficient processing of large vectors and matrices

- It contains its own data structures, e.g., `numpy` arrays
- These work similar to Python lists

The Module `numpy`

numpy builds the foundation for many other scientific modules

Focus on efficient processing of large vectors and matrices

- It contains its own data structures, e.g., `numpy` arrays
- These work similar to Python lists
- `numpy` arrays are faster
- `numpy` arrays allow for more operations

The Module `numpy`

```
import numpy as np
```

The Module `numpy`

```
import numpy as np
```

- Convert Python list into `numpy` array

```
x = np.array([1, 3, 4])
```

The Module `numpy`

```
import numpy as np
```

- Convert Python list into `numpy` array

```
x = np.array([1, 3, 4])
```

- This also works for more dimensions

```
y = np.array([[1, 3, 4], [6, 8, 1], [0, 9, 4]])
```

The Module `numpy`

```
import numpy as np
```

- Convert Python list into `numpy` array

```
x = np.array([1, 3, 4])
```

- This also works for more dimensions

```
y = np.array([[1, 3, 4], [6, 8, 1], [0, 9, 4]])
```

- `numpy` arrays can be added and multiplied

```
print(x + y)
```

```
print(x * y)
```

The Module `numpy`

Large range of functions

- Linear algebra (Submodule)

```
import numpy as np
import numpy.linalg as npla

a = np.array([[5, 3, 0], [1, 2, 0], [0, 2, 11]])
b = np.array([4, 8, 1])

x = npla.solve(a, b)
```

The Module `numpy`

Large range of functions

- Linear algebra (Submodule)

```
import numpy as np
import numpy.linalg as npla

a = np.array([[5, 3, 0], [1, 2, 0], [0, 2, 11]])
b = np.array([4, 8, 1])

x = npla.solve(a, b)
```

- Statistics

The Module `numpy`

Large range of functions

- Linear algebra (Submodule)

```
import numpy as np
import numpy.linalg as npla

a = np.array([[5, 3, 0], [1, 2, 0], [0, 2, 11]])
b = np.array([4, 8, 1])

x = npla.solve(a, b)
```

- Statistics
- Interpolation (e.g., least square method)

The Module `numpy`

Large range of functions

- Linear algebra (Submodule)

```
import numpy as np
import numpy.linalg as npla

a = np.array([[5, 3, 0], [1, 2, 0], [0, 2, 11]])
b = np.array([4, 8, 1])

x = npla.solve(a, b)
```

- Statistics
- Interpolation (e.g., least square method)
- ...

The Module `matplotlib`

The Module `matplotlib`

Module to generate plots

- Data visualization
- Submodule `matplotlib.pyplot` allows usage analogously to MATLAB
- Data given by, e.g., Python lists or `numpy` arrays

The Module `matplotlib`

Module to generate plots

- Data visualization
- Submodule `matplotlib.pyplot` allows usage analogously to MATLAB
- Data given by, e.g., Python lists or `numpy` arrays

```
import numpy as np
import matplotlib.pyplot as plt

plt.plot([1, 4, 9, 16, 25])
plt.show()
```


The Module `matplotlib`

Module to generate plots

- Data visualization
- Submodule `matplotlib.pyplot` allows usage analogously to MATLAB
- Data given by, e.g., Python lists or `numpy` arrays

```
import numpy as np
import matplotlib.pyplot as plt

plt.plot([1, 4, 9, 16, 25])
plt.show()
```

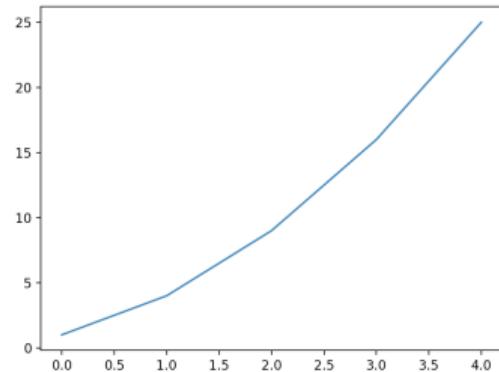

The Module `matplotlib` – Code-Expert

- The function `show` cannot be used in Code-Expert
- Instead, we save the plot using the function `savefig()`

```
import numpy as np
import matplotlib.pyplot as plt

plt.plot([1, 4, 9, 16, 25])
plt.savefig("cx_out/out.png")
```

The Module `matplotlib` – Code-Expert

- The function `show` cannot be used in Code-Expert
- Instead, we save the plot using the function `savefig()`

```
import numpy as np
import matplotlib.pyplot as plt

plt.plot([1, 4, 9, 16, 25])
plt.savefig("cx_out/out.png")
```

- Plot has to be saved in `cx_out`
- Display under “Files”

The Module `matplotlib` – Code-Expert


- The function `show` cannot be used in Code-Expert
- Instead, we save the plot using the function `savefig()`

```
import numpy as np
import matplotlib.pyplot as plt

plt.plot([1, 4, 9, 16, 25])
plt.savefig("cx_out/out.png")
```

- Plot has to be saved in `cx_out`
- Display under “Files”
- **Within these slides, we use `show()`**


The Module `matplotlib`

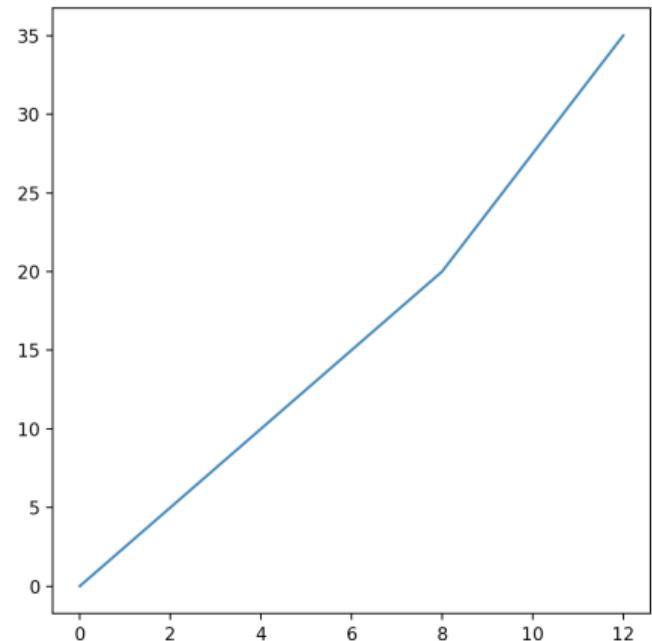

The Module `matplotlib`

- Specifying both x - and y -values:

```
plt.plot([0, 4, 8, 12], [0, 10, 20, 35])  
plt.show()
```

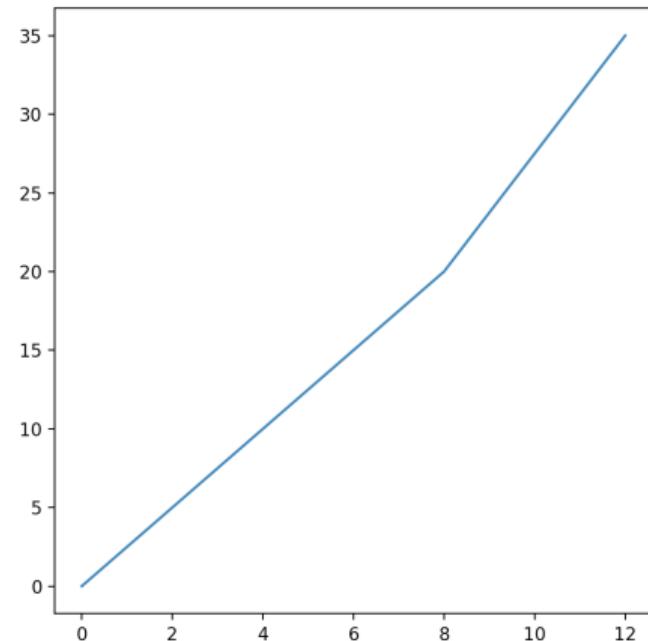


The Module `matplotlib`

- Specifying both x - and y -values:

```
plt.plot([0, 4, 8, 12], [0, 10, 20, 35])  
plt.show()
```

- Using `numpy` arrays:

```
x = np.array([0, 4, 8, 12])  
y = np.array([0, 10, 20, 35])  
plt.plot(x, y)  
plt.show()
```

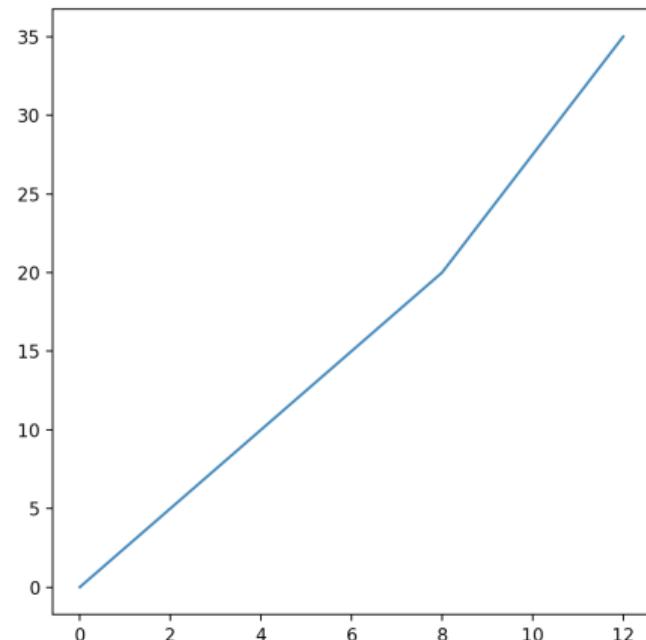

The Module `matplotlib`

- Specifying both x - and y -values:


```
plt.plot([0, 4, 8, 12], [0, 10, 20, 35])  
plt.show()
```

- Using `numpy` arrays:

```
x = np.array([0, 4, 8, 12])  
y = np.array([0, 10, 20, 35])  
plt.plot(x, y)  
plt.show()
```

- Using `arange()` instead of `range()`:

```
x = np.arange(0, 13, 4)  
y = np.array([0, 10, 20, 35])  
plt.plot(x, y)  
plt.show()
```

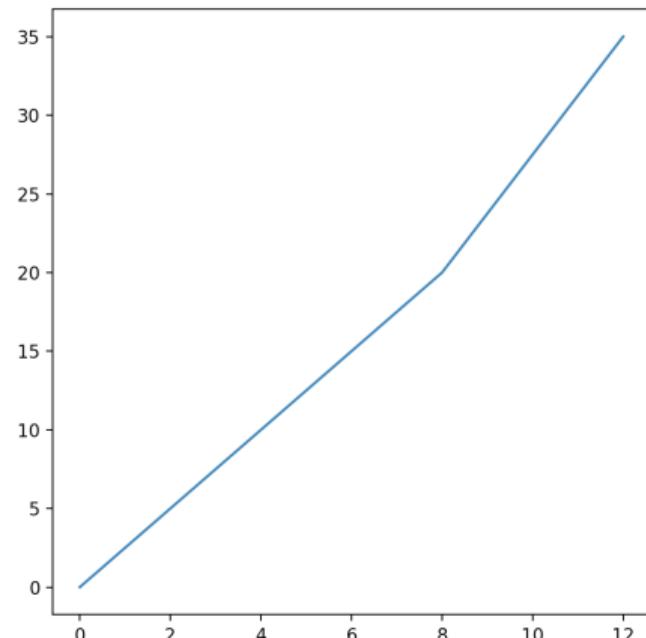

The Module `matplotlib`

`plot(<x-values>, <y-values>, <list of options>)`

```
import numpy as np
import matplotlib.pyplot as plt

x = np.arange(0, 10.01, 0.01)
f1 = np.sin(x)
f2 = np.cos(x)
f3 = 0.01 * x**2 + 0.15 * x - 1

plt.plot(x, f1, color="red")
plt.plot(x, f2, color="blue")
plt.plot(x, f3, color="green")

plt.show()
```

The Module `matplotlib`

`plot(<x-values>, <y-values>, <list of options>)`

```
import numpy as np  
import matplotlib.pyplot as plt
```

```
x = np.arange(0, 10.01, 0.01)  
f1 = np.sin(x)  
f2 = np.cos(x)  
f3 = 0.01 * x**2 + 0.15 * x - 1
```

```
plt.plot(x, f1, color="red")  
plt.plot(x, f2, color="blue")  
plt.plot(x, f3, color="green")
```

```
plt.show()
```

← Import of `numpy` and `matplotlib`

The Module `matplotlib`

`plot(<x-values>, <y-values>, <list of options>)`

```
import numpy as np
import matplotlib.pyplot as plt

x = np.arange(0, 10.01, 0.01) ← x-values 0, 0.01, 0.02, ..., 10
f1 = np.sin(x)
f2 = np.cos(x)
f3 = 0.01 * x**2 + 0.15 * x - 1

plt.plot(x, f1, color="red")
plt.plot(x, f2, color="blue")
plt.plot(x, f3, color="green")

plt.show()
```

The Module `matplotlib`

`plot(<x-values>, <y-values>, <list of options>)`

```
import numpy as np
import matplotlib.pyplot as plt

x = np.arange(0, 10.01, 0.01)
f1 = np.sin(x)
f2 = np.cos(x)
f3 = 0.01 * x**2 + 0.15 * x - 1

plt.plot(x, f1, color="red")
plt.plot(x, f2, color="blue")
plt.plot(x, f3, color="green")

plt.show()
```

Three functions: sine, cosine, polynomial
(`plot` is not yet displayed)

The Module `matplotlib`

`plot(<x-values>, <y-values>, <list of options>)`

```
import numpy as np
import matplotlib.pyplot as plt

x = np.arange(0, 10.01, 0.01)
f1 = np.sin(x)
f2 = np.cos(x)
f3 = 0.01 * x**2 + 0.15 * x - 1

plt.plot(x, f1, color="red")
plt.plot(x, f2, color="blue")
plt.plot(x, f3, color="green")
```

`plt.show()`

plot is displayed

The Module `matplotlib`


`plot(<x-values>, <y-values>, <list of options>)`

```
import numpy as np
import matplotlib.pyplot as plt

x = np.arange(0, 10.01, 0.01)
f1 = np.sin(x)
f2 = np.cos(x)
f3 = 0.01 * x**2 + 0.15 * x - 1

plt.plot(x, f1, color="red")
plt.plot(x, f2, color="blue")
plt.plot(x, f3, color="green")

plt.show()
```

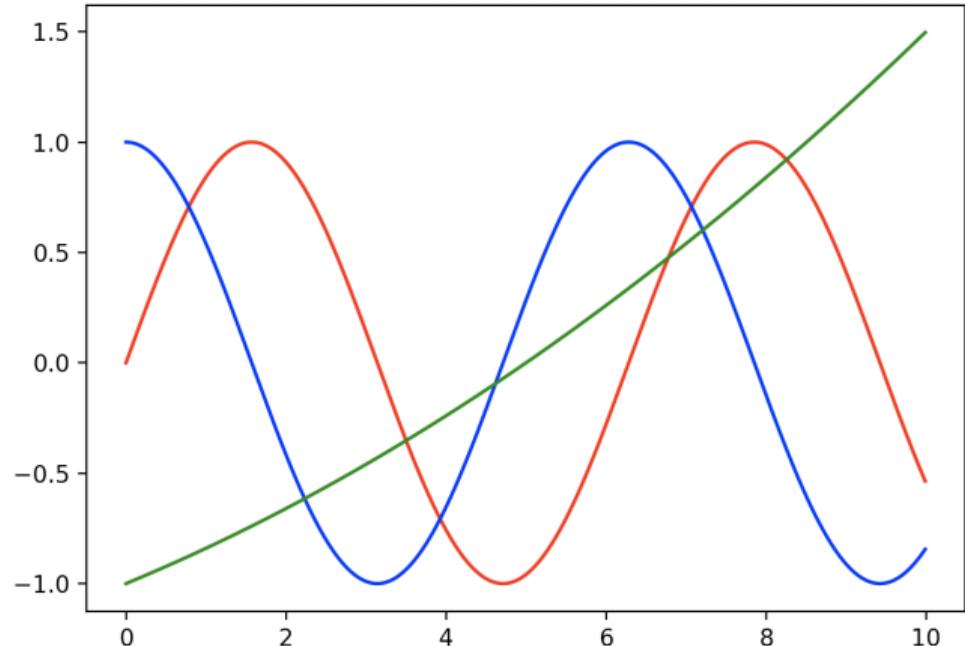

The Module `matplotlib`

Options

- color, line style, line width, dots instead of lines, ...
- See documentation

The Module `matplotlib`

Options

- color, line style, line width, dots instead of lines, ...
- See documentation

Labeling axes

- `plt.xlabel()`
- `plt.ylabel()`

The Module `matplotlib`

Options

- color, line style, line width, dots instead of lines, ...
- See documentation

Labeling axes


- `plt.xlabel()`
- `plt.ylabel()`

Animations

- Displaying plot only shortly with `plt.pause()` instead of `plt.plot()`
- Removing old plot with `plt.close()`
- Submodule `matplotlib.animation` for more professional animations
- Also see documentation


The Module `matplotlib`

```
x = np.array([1, 2, 1.5, 1.75, 1.5])
y = np.array([2, 1.75, 1.5, 2.25, 1.85])
plt.scatter(x, y)
plt.show()
```




The Module `matplotlib`

```
x = np.array([1, 2, 1.5, 1.75, 1.5])
y = np.array([2, 1.75, 1.5, 2.25, 1.85])
plt.scatter(x, y)
plt.show()
```




```
x = np.arange(0, 10)
y = np.array([1, 4, 4, 8, 9, 6, 7, 6, 3, 2])
plt.bar(x, y)
plt.show()
```





The Module `matplotlib`

```
x = np.array([1, 2, 1.5, 1.75, 1.5])
y = np.array([2, 1.75, 1.5, 2.25, 1.85])
plt.scatter(x, y)
plt.show()
```



```
x = np.arange(0, 10)
y = np.array([1, 4, 4, 8, 9, 6, 7, 6, 3, 2])
plt.bar(x, y)
plt.show()
```



```
x = np.arange(0, 10)
y = np.array([1, 1, 2, 3, 4, 2, 3, 6, 7, 9])
plt.barh(x, y)
plt.show()
```

Animated Bubblesort

```
import matplotlib.pyplot as plt

def bubblesort(data):
    n = len(data)
    x = range(len(data))
    for d in range(n, 1, -1):
        for i in range(0, d-1):
            plt.bar(x, data)
            plt.pause(0.001)
            plt.close()

            if data[i] > data[i+1]:
                tmp = data[i]
                data[i] = data[i+1]
                data[i+1] = tmp
    return data

print(bubblesort([6, 22, 61, 1, 89, 31, 9, 10, 76]))
```

Animated Bubblesort – Code-Expert

```
import matplotlib.pyplot as plt

def bubblesort(data):
    n = len(data)
    x = range(len(data))
    for d in range(n, 1, -1):
        for i in range(0, d-1):
            plt.bar(x, data)
            plt.savefig("cx_out/out.png")
            input("Weiter mit beliebiger Taste")
            plt.close()
            if data[i] > data[i+1]:
                tmp = data[i]
                data[i] = data[i+1]
                data[i+1] = tmp
    return data

print(bubblesort([6, 22, 61, 1, 89, 31, 9, 10, 76]))
```

The Module `matplotlib`

Visualizing the complexity of Bubblesort

Exercise – Complexity of Bubblesort

- Copy Bubblesort
- Use a variable `counter` to count the number of comparisons
- Return this value using `return`
- Run this algorithm on backward-sorted lists of lengths from 10 to 200
- Save these values in a list and plot it



Complexity of Bubblesort

```
def bubblesort(data):
    n = len(data)
    counter = 0
    for d in range(n, 1, -1):
        for i in range(0, d-1):
            counter += 1
            if data[i] > data[i+1]:
                tmp = data[i]
                data[i] = data[i+1]
                data[i+1] = tmp
    return counter
```

```
values = []
for i in range(10, 201):
    data = np.arange(i, 0, -1)
    values.append(bubblesort(data))

plt.plot(values)
plt.show()
```

Complexity of Bubblesort

```
def bubblesort(data):
    n = len(data)
    counter = 0
    for d in range(n, 1, -1):
        for i in range(0, d-1):
            counter += 1
            if data[i] > data[i+1]:
                tmp = data[i]
                data[i] = data[i+1]
                data[i+1] = tmp
    return counter
```

```
values = []
for i in range(10, 201):
    data = np.arange(i, 0, -1)
    values.append(bubblesort(data))

plt.plot(values)
plt.show()
```

Count comparisons

Complexity of Bubblesort

```
def bubblesort(data):
    n = len(data)
    counter = 0
    for d in range(n, 1, -1):
        for i in range(0, d-1):
            if data[i] > data[i+1]:
                counter += 1
                tmp = data[i]
                data[i] = data[i+1]
                data[i+1] = tmp
    return counter
```

```
values = []
for i in range(10, 201):
    data = np.arange(i, 0, -1)
    values.append(bubblesort(data))
```

```
plt.plot(values)
plt.show()
```

Count permutations

Complexity of Bubblesort

Worst Case

```
for i in range(10, 201):
    worst_data = np.arange(i, 0, -1)
    worst_values.append(bubblesort(worst_data))
```

Complexity of Bubblesort

Worst Case

```
for i in range(10, 201):
    worst_data = np.arange(i, 0, -1)
    worst_values.append(bubblesort(worst_data))
```

Best Case

```
for i in range(10, 201):
    best_data = np.arange(1, i+1, 1)
    best_values.append(bubblesort(best_data))
```

Complexity of Bubblesort

Worst Case

```
for i in range(10, 201):
    worst_data = np.arange(i, 0, -1)
    worst_values.append(bubblesort(worst_data))
```

Best Case

```
for i in range(10, 201):
    best_data = np.arange(1, i+1, 1)
    best_values.append(bubblesort(best_data))
```

Average Case

```
for i in range(10, 201):
    avg_data = np.random.randint(i, size=i)
    avg_values.append(bubblesort(avg_data))
```

Complexity of Bubblesort

Average Case (Vertauschungen)

```
for i in range(10, 201):
    worst_data = np.arange(i, 0, -1)
    best_data = np.arange(1, i+1, 1)
    avg_data = np.random.randint(i, size=i)
    worst_values.append(bubblesort(worst_data))
    best_values.append(bubblesort(best_data))
    avg_values.append(bubblesort(avg_data))

plt.plot(worst_values, color="red")
plt.plot(best_values, color="green")
plt.plot(avg_values, color="black")

plt.show()
```

Complexity of Bubblesort

Average Case (Vertauschungen)

```
for i in range(10, 201):
    worst_data = np.arange(i, 0, -1)
    best_data = np.arange(1, i+1, 1)
    avg_data = np.random.randint(i, size=i)
    worst_values.append(bubblesort(worst_data))
    best_values.append(bubblesort(best_data))
    avg_values.append(bubblesort(avg_data))

plt.plot(worst_values, color="red")
plt.plot(best_values, color="green")
plt.plot(avg_values, color="black")

plt.show()
```

Returns `numpy` array of length i
with random numbers
between 0 and i


Complexity of Bubblesort

Average Case (Vertauschungen)

```
for i in range(10, 201):
    worst_data = np.arange(i, 0, -1)
    best_data = np.arange(1, i+1, 1)
    avg_data = np.random.randint(i, size=i)
    worst_values.append(bubblesort(worst_data))
    best_values.append(bubblesort(best_data))
    avg_values.append(bubblesort(avg_data))

plt.plot(worst_values, color="red")
plt.plot(best_values, color="green")
plt.plot(avg_values, color="black")

plt.show()
```

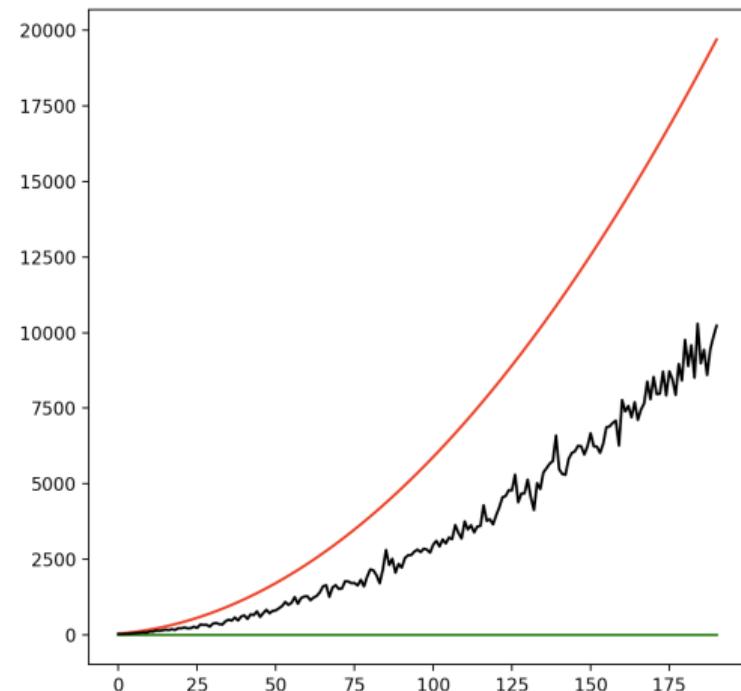

The module pandas

The Module pandas

pandas

- Processing of large sets of data
- Allows a functionality similar to Excel
- Documentation: <https://pandas.pydata.org/pandas-docs/stable/>

The Module pandas

pandas

- Processing of large sets of data
 - Allows a functionality similar to Excel
 - Documentation: <https://pandas.pydata.org/pandas-docs/stable/>
-
- **So far** Reading in and processing CSV file “manually”
 - **pandas** contains data structures and functions for this

The Module pandas

- Import pandas analogously to numpy and matplotlib

```
import pandas as pd
```

The Module pandas

- Import pandas analogously to numpy and matplotlib

```
import pandas as pd
```

- Read in CSV file and store it in a special data type pandas dataframe (instead of Python list or numpy array)

```
data = pd.read_csv("daten.csv")
```

The Module pandas

- Import pandas analogously to numpy and matplotlib

```
import pandas as pd
```

- Read in CSV file and store it in a special data type pandas dataframe (instead of Python list or numpy array)

```
data = pd.read_csv("daten.csv")
```

- Files in Excel format can be read in analogously

```
data = pd.read_excel("daten.xlsx")
```

Air Measurements using pandas

Exercise – Air Measurements

Air measurements

- In Code Expert, you find a file
`ugz_luftqualitaetsmessungen_seit-2012.csv`
- Read in the CSV file and output its content
- To this end, use `read_csv()` and `print()`



Air Measurements

```
import pandas as pd

data = pd.read_csv("ugz_luftqualitaetsmessungen_seit-2012.csv")
print(data)
```

Air Measurements

```
import pandas as pd

data = pd.read_csv("ugz_luftqualitaetsmessungen_seit-2012.csv")
print(data)
```

- Accessing individually cells using `data.iloc`
- Same functionality as lists

Air Measurements

```
import pandas as pd

data = pd.read_csv("ugz_luftqualitaetsmessungen_seit-2012.csv")
print(data)
```

- Accessing individually cells using `data.iloc`
- Same functionality as lists

```
print(data.iloc[5])
print(data.iloc[0:10])
print(data.head(3))
print(data.iloc[8, 0])
```

Air Measurements

```
import pandas as pd

data = pd.read_csv("ugz_luftqualitaetsmessungen_seit-2012.csv")
print(data)
```

- Accessing individually cells using `data.iloc`
- Same functionality as lists

```
print(data.iloc[5])
print(data.iloc[0:10])
print(data.head(3))
print(data.iloc[8, 0])
```

Output line 5

Air Measurements

```
import pandas as pd

data = pd.read_csv("ugz_luftqualitaetsmessungen_seit-2012.csv")
print(data)
```

- Accessing individually cells using `data.iloc`
- Same functionality as lists

```
print(data.iloc[5])
print(data.iloc[0:10])                                         Output lines 0 to 9
print(data.head(3))
print(data.iloc[8, 0])
```

Air Measurements

```
import pandas as pd

data = pd.read_csv("ugz_luftqualitaetsmessungen_seit-2012.csv")
print(data)
```

- Accessing individually cells using `data.iloc`
- Same functionality as lists

```
print(data.iloc[5])
print(data.iloc[0:10])
print(data.head(3))
print(data.iloc[8, 0])
```

Output lines 0 to 2

Air Measurements

```
import pandas as pd

data = pd.read_csv("ugz_luftqualitaetsmessungen_seit-2012.csv")
print(data)
```

- Accessing individually cells using `data.iloc`
- Same functionality as lists

```
print(data.iloc[5])
print(data.iloc[0:10])
print(data.head(3))
print(data.iloc[8, 0])
```

Output line 8, column 0

Reading in and Processing CSV Files

Extract data

Reading in and Processing CSV Files

Extract data

- Numerical data starts from line 5
- We are only interested in the first 3 columns
- We want to change column names

Reading in and Processing CSV Files

Extract data

- Numerical data starts from line 5
- We are only interested in the first 3 columns
- We want to change column names

```
import pandas as pd

data = pd.read_csv("ugz_luftqualitaetsmessungen_seit-2012.csv")
newdata = data.iloc[5:, 0:3]
newdata = newdata.rename(columns={"Zürich Stampfenbachstrasse": "S02", \
                                 "Zürich Stampfenbachstrasse.1": "CO"})
newdata.to_csv("messungen.csv")
```

Reading in and Processing CSV Files

Extract data

- Numerical data starts from line 5
 - We are only interested in the first 3 columns
 - We want to change column names
- Selection from line 5
and columns 0 to 2

```
import pandas as pd

data = pd.read_csv("ugz_luftqualitaetsmessungen_seit-2012.csv")
newdata = data.iloc[5:, 0:3]  
newdata = newdata.rename(columns={"Zürich Stampfenbachstrasse": "S02", \
                                  "Zürich Stampfenbachstrasse.1": "CO"})
newdata.to_csv("messungen.csv")
```


Reading in and Processing CSV Files

Extract data

- Numerical data starts from line 5
- We are only interested in the first 3 columns
- We want to change column names

```
import pandas as pd

data = pd.read_csv("ugz_luftqualitaetsmessungen_seit-2012.csv")
newdata = data.iloc[5:, 0:3]
newdata = newdata.rename(columns={"Zürich Stampfenbachstrasse": "S02", \
                                  "Zürich Stampfenbachstrasse.1": "CO"})
newdata.to_csv("messungen.csv")
```



Rename columns

Reading in and Processing CSV Files

Accessing data using the column names

Reading in and Processing CSV Files

Accessing data using the column names

- Output all column names as list

```
print(data.columns)
```

Reading in and Processing CSV Files

Accessing data using the column names

- Output all column names as list

```
print(data.columns)
```

- Output column “Datum”

```
print(data["Datum"])
```

Reading in and Processing CSV Files

Accessing data using the column names

- Output all column names as list

```
print(data.columns)
```

- Output column “Datum”

```
print(data["Datum"])
```

- Output column “Zürich Stampfenbachstrasse – Kohlenmonoxid”

```
print(data["Zürich Stampfenbachstrasse.1"])
```

Reading in and Processing CSV Files

Filtering data

Reading in and Processing CSV Files

Filtering data

- Use `loc` instead of `iloc` in order to specify conditions

```
print(data.loc[data["Datum"] == "2014-12-19"])
```

Reading in and Processing CSV Files

Filtering data

- Use `loc` instead of `iloc` in order to specify conditions

```
print(data.loc[data["Datum"] == "2014-12-19"])
```

- Combination of different Boolean expressions

- Parentheses around single expressions
- `&` instead of `and`
- `|` instead of `or`
- `~` instead of `not`

```
print(data.loc[(data["Datum"] == "2014-12-19") \  
                | (data["Datum"] == "2014-12-20"))
```

Reading in and Processing CSV Files

Filtering data

Reading in and Processing CSV Files

Filtering data

- Convert strings to rational numbers (`float`)

```
newdata["S02"] = newdata["S02"].astype(float)  
newdata["CO"] = newdata["CO"].astype(float)
```

Reading in and Processing CSV Files

Filtering data

- Convert strings to rational numbers (`float`)

```
newdata["S02"] = newdata["S02"].astype(float)  
newdata["CO"] = newdata["CO"].astype(float)
```

- Use relation operators to filter

```
print(newdata.loc[newdata["S02"] > 0.1])
```

Reading in and Processing CSV Files

Filtering data

- Convert strings to rational numbers (`float`)

```
newdata["S02"] = newdata["S02"].astype(float)  
newdata["CO"] = newdata["CO"].astype(float)
```

- Use relation operators to filter

```
print(newdata.loc[newdata["S02"] > 0.1])
```

- Combine different Boolean expressions

```
print(newdata.loc[(newdata["S02"] > 0.1) & (newdata["S02"] < 0.4)])
```

Reading in and Processing CSV Files

Filtering data

- Convert strings to rational numbers (`float`)

```
newdata["S02"] = newdata["S02"].astype(float)  
newdata["CO"] = newdata["CO"].astype(float)
```

- Use relation operators to filter

```
print(newdata.loc[newdata["S02"] > 0.1])
```

- Combine different Boolean expressions

```
print(newdata.loc[(newdata["S02"] > 0.1) & (newdata["S02"] < 0.4)])
```

- Choose columns with second argument

```
print(newdata.loc[newdata["S02"] > 0.2, "Datum"])
```

Exercise – Air Measurements

Air measurements

- Extract all CO entries from `newdata` for which the SO₂ value is smaller than 0.1 or larger than 0.25
- Convert the CO entries into a Python list using `list()`
- Plot the values using `matplotlib`



Reading in CSV File

```
import pandas as pd
import matplotlib.pyplot as plt

data = pd.read_csv("ugz_luftqualitaetsmessungen_seit-2012.csv")

newdata = data.iloc[5:, 0:3]
newdata = newdata.rename(columns={"Zürich Stampfenbachstrasse": "S02", \
                                 "Zürich Stampfenbachstrasse.1": "CO"})

newdata["S02"] = newdata["S02"].astype(float)
newdata["CO"] = newdata["CO"].astype(float)

newdata = newdata.loc[(newdata["S02"] < 0.1) | (newdata["S02"] > 0.25), "CO"]
datalist = list(newdata)
plt.plot(datalist)
plt.show()
```

Pandas

Further Functionality

Further Functionality

- Delete columns

```
del data["Column"]
```

Further Functionality

- Delete columns

```
del data["Column"]
```

- Add columns

```
data["Sum"] = data["Column 1"] + data["Column 2"]
```

Further Functionality

- Delete columns

```
del data["Column"]
```

- Add columns

```
data["Sum"] = data["Column 1"] + data["Column 2"]
```

- Sort data

```
data = data.sort_values("Column")
```

Further Functionality

- Delete columns

```
del data["Column"]
```

- Add columns

```
data["Sum"] = data["Column 1"] + data["Column 2"]
```

- Sort data

```
data = data.sort_values("Column")
```

- ...

Thanks for your
attention